

YOUR POWER TO SUCCESS

BEST FUEL ECONOMY
BEST COST OF OWNERSHIP

BEST IN RELIABILITY
BEST IN CLASS SERVICE



* Terms and conditions apply



You can rely on us...

EICHER ENGINES
AIR COOLED

TMTL ENGINES
WATER COOLED

#IndiaKaEngine



FEATURES & BENEFITS

ENGINE

Cutting Edge Technology	Best in Class Fuel Efficiency
	Lowest Maintenance
	Longest Oil Change Period
	Longest Overhauling Period
A 1 Governing	Most Economical Genset
	Quality of Power
High Moment of Inertia and Torque	Lowest Flickering and Fluctuation
	Best in Class Block Loading Capability
Individual Blowers (Air Cooled Range)	Better Performance at Varying Loads
	Even cooling of all the cylinders
Turbo Charger with Inter Cooler (Water Cooled Range)	Better efficiency
	Better Engine Efficiency
Most Reliable Engines	Prime Power Rating available across range
	Most Powerful Engines in their Class

ACOUSTIC ENCLOSURE

CRCA Sheet	Longer Life
40 mm PU Foam (5 to 60 kVA)	Thickest in its class
	Low noise and vibration level
Silencer Inside the Canopy	Super Silent Options available
	Better Aesthetics
Compact Size	Longer life of Silencer
	Saves Space
Large Doors on Both Sides Drain Provided for Lube Oil and Fuel Tank	Suitable for roof top installation
	Ease of Maintenance
Unitary Front and Back Panel Canopy with Internal Bolting Stainless Steel Hinges with SS Studs SS Slam Locks with Barrel & Padlock arrangement	Higher Degree of Safety
Dual Fuel Lock S-bend Fuel Pipe Stainless Steel Fuel Strainer	Pilferage Proof
State of Art Powder Coating Plant	Long Life Weather Protection

BEST IN CLASS SERVICE

Single Point of Contact	Delighted Customer
Round the Clock Assistance	
Pan India Service Network	
Highly Qualified & Trained Service Team	
Post Service Feedback Mechanism	



Controller: DSE4522 MKI

KEY FEATURES OF DSE 4522 CONTROLLER


- LCD display
- True RMS Voltage
- Current and Power monitoring
- USB Communications
- Engine parameter monitoring.
- Fully configurable inputs for use as alarms or a range of different functions.
- Engine ECU interface to electronic engines
- The DSE smart PC Software allows
- Alteration of selected operational sequences,
- Timers, alarms and operational sequences.
- **Operating Temperature:** -30 °C +70 °C (-22 °F +158 °F)
- **Operating voltage:** 8 V to 32 V DC
- **COMMUNICATION PORTS :**
USB Port: Type B USB 2.0 For connection to PC
- Configurable digital inputs/output
- Generator running hours counter
- Three phase sensing
- Generator Power Monitoring like, Kilo watts / KV/Amp / Ar / Power factor
- Generator Protections like, Over load, Over voltage , Low Voltage, Single phasing
- Engine Protection like, Low RPM, High RPM, Low Lube oil , High Temperature
- Event Log
- Generator monitoring like, Battery Voltage, Engine run time scheduler ,
- Maintenance Alarm
- Automatic transfers between Generator and utility (Mains) transfer facility is available
- Remote Start / stop facility
- IP42 (front of module when installed into the control panel WITHOUT being sealed to the panel)
- IP65 (front of module when installed into the control panel with the optional

TECHNICAL SPECIFICATIONS

Technical Specifications - 35 KVA

Genset Rating	kVA	35
Genset Model		PECH 35 SP/TP
Duty	Prime / Standby	Prime
Engine manufacturer	-	TAFE Motors and Tractors Limited
Engine Brand		Eicher Engines
Engine model	-	329A0-EG035
Number of cylinders	nos.	3
Aspiration	-	Turbo Charged Inter-Cooled
Engine power (gross)	BHP	46
Rated speed & frequency	RPM /Hz	1500/ 50 Hz
Stroke	mm	125
Bore	mm	100
Displacement	cc	2945
Compression ratio	-	17:01
Reference standard	-	BS: 5514, ISO: 3046, ISO: 8528
Type of governer	-	Electronic
Class of Governing	-	G3
Air cleaner	-	Dry
Type of cooling	-	AIR COOLED
Fuel Tank Capacity	L	100
Lube oil Sump capacity (with filters)	L	9.5
Phase	-	1 Phase-2 wire / 3Phase-4 wire
Voltage	VAC	230/ 240, 415
Voltage Regulation	%ge of Rated voltage	+/- 1%
Power Factor	Lag	0.8
Power Alternator Type	-	Single Bearing, Brushless
Insulation	-	Class-H
Make	-	Stamford / Leroy Somer / CG or equivalent
Starting System	-	Electric
Battery	Volts, Ah	12 Volts, 88 / 90 Ah
Silencer Location & Type		Internal / Residential
Acoustic Insulation Type	-	PU FR- Acoustic Foam
Acoustic Insulation Thickness	mm	40
DG Set Dimensions (L X B X H)	mm	2250 x 1000 x 1425
Weight of DG Set (Approx)+	kg	1225

Dimensions and Weight

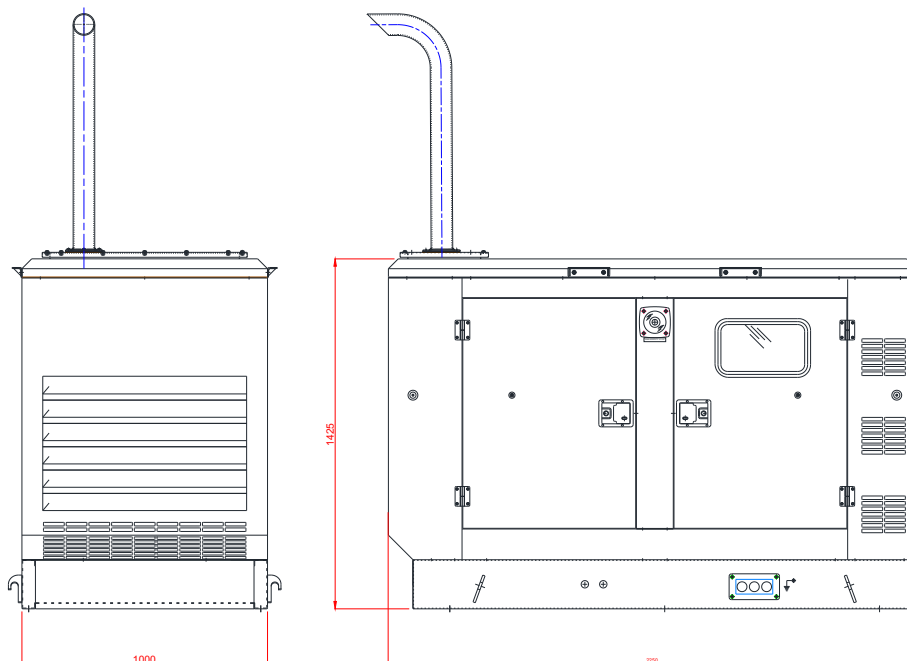

Overall Size (L x W x H): 2250 X 1000 X 1425 (mm)

Weight (Dry, Max):

NOTE: Drawing provided is for reference only and should not be used for planning installation. Please contact the Company or latest updated details. All the data is as per respective manufacturers' specification. PERFECT reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Disclaimer: Due to continues product improvements, specifications are subject to change without prior notice.



Perfect House Pvt. Ltd.

CORPORATE OFFICE:

2nd Floor, 99C Kavya Aura, Next to Rosewood Hotel, Tardeo, Mumbai – 400034

FACTORIES:

Plot no. M-7, Additional MIDC, Satara -415004

Plot no. J-2/6, Additional MIDC, Satara -415004

Plot no. J-2/5, Additional MIDC, Satara -415004

OFFICE NUMBER:

+9122-62611900/907

022-22677357 / 022-62611900

Toll Free No. 1800 88 96498

Email: sales@perfectgenset.com